Trade batt selection guide


The science of making a better **batt**

PINKOLOGY.



PINKOLOGY.

Introducing next generation batts, engineered for a fast firm fit

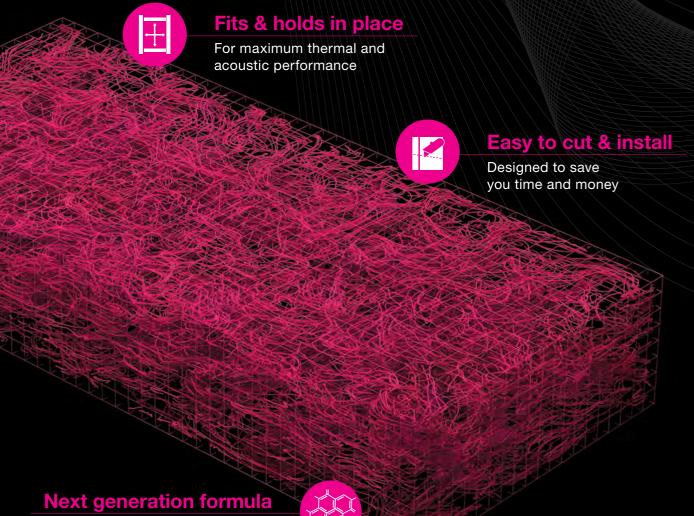

For better recovery and softer handling

From our next generation formula to innovative new packaging, **PINKOLOGY™** represents our passion towards making a better glasswool insulation batt.

Our next generation organic binder produces a glasswool batt that is rigid yet soft to handle, and recovers to its full thickness faster, without extra fuss.


Cutting and installation is easy too. And Pink[®] Batts stay in place. Which is important, because a gap of only 5% can result in up to a 20% drop in thermal performance.

At Fletcher Insulation we do not compromise on quality. With Pink[®] Batts, you can be confident that the insulation you install will perform better for longer. We guarantee it, with a lifetime consumer warranty.

The whole-of-home solution that puts you in the pink.

Our **PINKOLOGY**[™] whole-of-home approach features an innovative system of complementary insulation products available in a range of Material R-Values to suit all Australian climate zones. Everything you need to create a comfortable, energy efficient home for your customers is here. From Pink[®] Batts for walls, floors and ceilings to SISALATION[®] building membranes for walls and roofs, and PERMASTOP[®] Building Blankets. Plus Pink[®] SOUNDBREAK[®], specifically designed to reduce the volume of noise coming in from outside, as well as unwanted noise between rooms inside the home.

When it's Pink® it fits all together better. You save time and money, and get a great result.

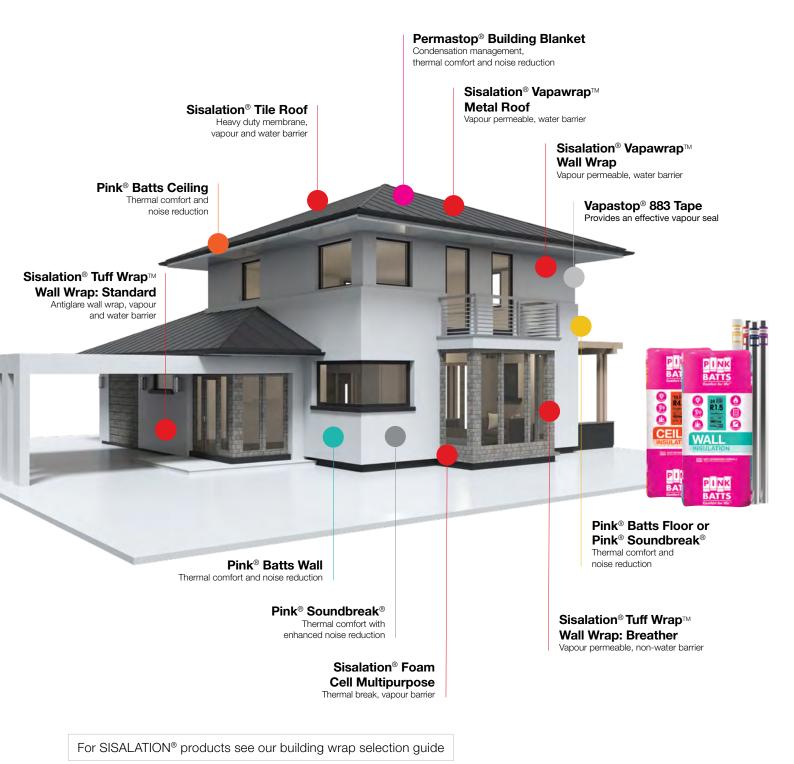

Pick the right **Pink**[®] product for your next project*



Pink[®] Batts Wall

Internal & External Walls

High thermal performance + effective noise reduction

FRAME TYPE	R-VALUE	THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	QUANTITY PER PACK	COVERAGE (m²)	PRODUCT CODE
	R1.5	70	430	1160	24	13.6	900166
	01.0	70	580	1160	24	18.2	900167
	R2.0	90	430	1160	24	13.6	901217
	N2.U	90	580	1160	24	18.2	901218
TIMBER	R2.0 HD	70	430	1160	12	6.8	900210
TIVIDEN			580	1160	12	9.1	900211
		90	430	1160	16	9.0	901220
	R2.2	90	580	1160	16	12.2	901221
	R2.5 HD	90	430	1160	12	6.8	900253
			580	1160	12	9.1	900256
STEEL	R2.0 HD	70	600	1200	12	8.6	900213
	R2.5 HD	90	600	1200	12	8.6	900214







Non-combustible in accordance

with AS/NZS1530.1



Pink[®] Batts Ceiling

Ceilings

High thermal performance + effective noise reduction

FRAME TYPE	R-VALUE	THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	QUANTITY PER PACK	COVERAGE (m²)	PRODUCT CODE
	R2.5	130	430	1160	16	9.0	901254
	n2.5	130	580	1160	16	12.2	901255
	R3.0	155	430	1160	16	9.0	901304
	NO.U	100	580	1160	16	12.2	901305
	R3.5	175	430	1160	16	9.0	901354
	no.0	175	580	1160	10	7.6	901355
TIMBER	R4.1	195	430	1160	10	5.6	901414
& STEEL			580	1160	10	7.6	901415
	R5.0	215	430	1160	8	4.5	901504
			580	1160	8	6.1	901505
	R6.0	250	430	1160	6	3.4	901604
			580	1160	6	4.5	901605
	R7.0	285	430	1160	4	2.0	901704
			580	1160	4	2.7	901705





Non-combustible in accordance with AS/NZS1530.1



Pink[®] Soundbreak[®]

Internal & External Walls & Mid Floors

Superior acoustic performance

FRAME TYPE	R-VALUE	THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	QUANTITY PER PACK	COVERAGE (m²)	PRODUCT CODE
	R1.7	60	430	1160	12	6.9	902191
	n1. <i>1</i>	60	580	1160	12	9.1	902192
	R2.0	70	430	1160	10	5.6	902193
	Π2.0	70	580	1160		7.6	902194
	R2.5	90	430	1160	8	4.5	902196
TIMBER			580	1160		6.1	902197
	D0 7	90	430	1160	8	4.5	902198
	R2.7	90	580	1160	0	6.1	902199
	R3.1	110	430	1160	6	3.4	902201
			580	1160		4.5	902202
STEEL	R2.0	70	600	1200	10	7.2	902195
	R2.7	90	600	1200	8	5.8	902200



PINK BATTS

12 R2.5HD

P I NK BATTS

0

0

0



Pink[®] Batts Floor

Underfloor / Mid Floors

High thermal performance + effective noise reduction

FRAME TYPE	R-VALUE	THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	QUANTITY PER PACK	COVERAGE (m²)	PRODUCT CODE
TIMBER	R2.5 HD	90	430	1160	12	6.8	900263



warranty[†]





in accordance with AS/NZS1530.1.



Permastop[®] Building Blanket

Metal Roofs

High thermal performance + excellent condensation protection + noise reduction

ROOF TYPE	R-VALUE	THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	QUANTITY PER PACK	COVERAGE (m²)	PRODUCT CODE
METAL	R1.3	55	1200	15000	1	18	912150
	R1.4	60	1200	15000	1	18	910150
	R1.8	75	1200	15000	1	18	913150



Lifetime consumer warranty[†]



Tested in accordance with AS/NZS1530.3



Condensation management

Pink[®] Accessories



Pink[®] EmberGuard[™] Building Blanket

A non-combustible, mineral wool building blanket, that can be compressed under metal sheet and tiled roofing to provide peace of mind against ember attack.

It seals gaps under the corrugations or ribs of the roofing material and between roof components in accordance with the construction requirements of AS3959-2009 Clause 5.6.2, making it suitable for use in bushfire prone areas.



NOMINAL THICKNESS	WIDTH	LENGTH	QUANTITY	L/M	PRODUCT
(mm)	(mm)	(m)	PER PACK	PER PACK	CODE
25	300	20	4	80	910242





Vapastop[®] 883 Reinforced Foil Tape

A strong, reinforced foil tape that conforms well to corners and irregular surfaces to provide an effective vapour seal over the joins of reflective insulation products and/or composites.

WIDTH (mm)	LENGTH (m)	ROLLS PER CARTON	PRODUCT CODE
24	50	48	318039
48	50	24	318040
63	50	16	318080
72	50	16	318085

Why Choose Fletcher Insulation?

Fletcher Insulation really is a one-stop shop for all your thermal and acoustic insulation needs. We manufacture and distribute Pink® Batts, as well as some of Australia's most loved and trusted residential and commercial insulation brands.

We pride ourselves on continually improving our processes to provide products of the highest national and international standards, and technical support of extraordinary value to our customers.

For more information contact us or visit our online specifier advisory service for help finding the perfect insulation products for your project.

For further information

Call **1300 654 444** Email **info@insulation.com.au** Visit **insulation.com.au**







© Fletcher Insulation Pty Limited, 2020. The information contained within this bulletin is intended as a guide for information only and is subject to change without notice. Fletcher Insulation does not invite any person to act or rely upon such information. Before application in a particular situation, Fletcher Insulation recommends that you obtain appropriate independent qualified expert advice confirming the suitability of product(s) and information in question for the application proposed. To the extent permitted by law, Fletcher Insulation disclaims all liability (including liability for negligence) for all loss and damage resulting from the direct or indirect use, or reliance on, the information provided in this bulletin. TM and ® are registered trademark of Fletcher Insulation Pty Limited ACN 001 175 355, a member of the Fletcher Building Group. BR025_Revision_1_Issue Date 20012021.